




CAMEL GECO
CAMEL GECO ELETTRONICA S.r.l.

Exclusive Italian Agent & Distributor



IATF 16949 : 2016

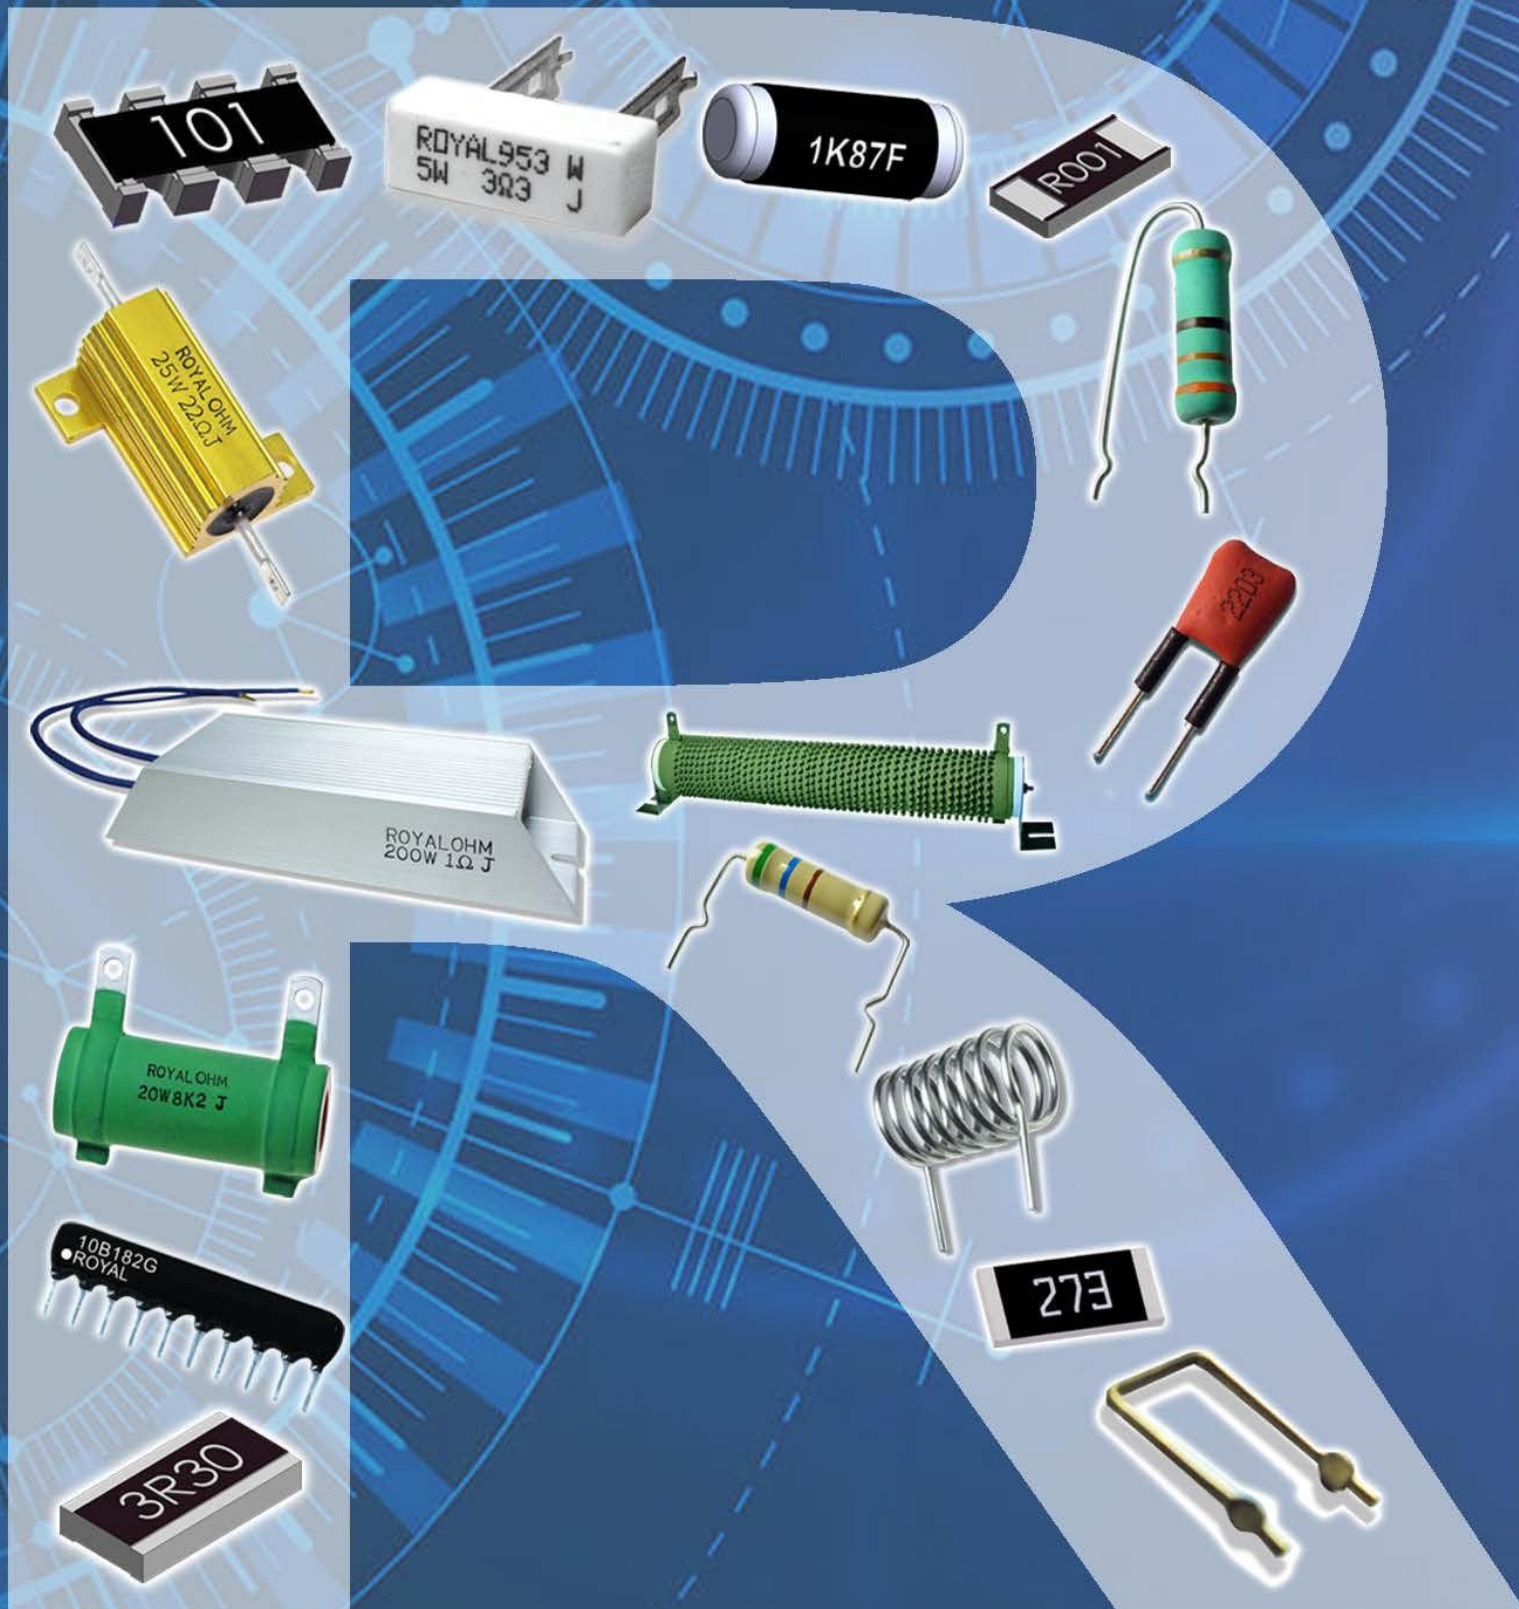

www.royalohm.com

since
1978
Resistors Specialist



Product List

Series Power Rating Value Range Tol T.C.R.
PPM/°C & REMARKS

CHIP RESISTORS

General Purpose

01005, 0201, 0402, 0603,
0805, 1206, 1210, 1812,
2010, 2512
High ohmic value available in sizes
0603, 0805, 1206, 1210



RMC

1/32W 0Ω/0.01Ω ±1%
~ ±2%
1W 100MΩ ±5%

0.01Ω~0.015Ω: ±1500PPM/°C
0.0154Ω~0.03Ω: ±1000PPM/°C
0.033Ω~0.976Ω: ±800PPM/°C
1Ω~10Ω: ±200PPM/°C
>10Ω~10M: ±100PPM/°C
>10M~100M: ±200PPM/°C
(01005, 0201, 0402 & 0603 refer to
catalog)

Wide Terminal

(AEC-Q200 Compliant)
WR08, WR12, WR20, WR18, WR25



WR

1/3W 0Ω/10mΩ ±1%
~ ±5%
3W 1MΩ

Depends on size and value
range

Anti-Surge (AEC-Q200 Compliant)

AS02, AS03, AS05, AS06, AS07,
AS10, AS12



AS

1/8W 1Ω ±5%
~ ±10%
2W 10MΩ ±20%

1Ω~10Ω: ±400PPM/°C
>10Ω~10MΩ: ±100PPM/°C

High Precision Anti-Surge

(AEC-Q200 Compliant)
PS02, PS03, PS05, PS06, PS07,
PS10, PS12



PS

1/8W 0.1Ω ±1%
~ ±5%
2W 10MΩ

PS02: 1Ω~10Ω: ±400PPM/°C
>11Ω~100Ω: ±200PPM/°C
>100Ω: ±100PPM/°C
Other sizes: ±100PPM/°C

Anti-Electrostatic Discharge

(AEC-Q200 Compliant)
ES01, ES02, ES03, ES05,
ES06, ES07



ES

1/20W 1Ω ±1%
~ ±5%
1/2W 10MΩ

1Ω~10Ω: ±200PPM/°C
>10Ω~10MΩ: ±100PPM/°C
(ES01 refer catalog)

High Power (AEC-Q200 Compliant)

HP02, HP03, HP05, HP06, HP07, HP10,
HP11, HP12



HP

1/10W 0Ω/0.01Ω ±1%
~ ±5%
2W 10MΩ

Depends on size and value
range

Ultra High Power

(AEC-Q200 Compliant)
SP10, SP12, SP17, SP20, SP27
(Product design Patent no.: I566261)



SP

1W 1Ω ±1%
~ ±5%
6W 10MΩ

1Ω~10Ω: ±200PPM/°C
>10Ω~10MΩ: ±100PPM/°C

High Voltage (AEC-Q200 Compliant)

HV03, HV05, HV06, HV07, HV10, HV12
Anti sulfurized available - VS12



HV

1/10W 36KΩ ±1%
~ ±5%
1W 10MΩ

±100PPM/°C

High Quality Anti-Sulfurized (NS) / Anti-Sulfurized Automotive (NQ)

(AEC-Q200 Compliant)
0201, 0402, 0603, 0805, 1206,
1210, 2010, 2512



NQ
NS

1/20W 0Ω/1Ω ±1%
~ ±5%
1W 10MΩ

1Ω~10Ω: ±200PPM/°C
>10Ω: ±100PPM/°C
(NQ01, NS01 refer to catalog)

Chip Array (Convex)

2D02, 2D03, 4D02, 4D03, 4DP3, 16P8



Array

1/16W 0Ω/1Ω ±1%
~ ±5%
1/10W 1MΩ

±200PPM/°C
(4D03, 4DP3, 16P8 refer to
catalog)

Chip Array Anti-Sulfurized

(AEC-Q200 Compliant)
2S02, 4S02, 4S03



Array

1/16W 0Ω/10Ω ±1%
~ ±5%
1MΩ

±200PPM/°C
(4S03 refer to catalog)

Chip Array (Concave)

2C02, 4C02, 4C03, 2F01, 4F01



Array

1/20W 0Ω/1Ω ±1%
~ ±5%
1/16W 1MΩ

±200PPM/°C
(4C03 refer to catalog)

Automotive (CQ) / Automotive High Power (HQ) (AEC-Q200 Compliant)

0201, 0402, 0603, 0805, 1206, 1210,
2010, 2512



HQ
CQ

1/20W 0Ω/1Ω ±1%
~ ±5%
1W 10MΩ

0201: 1Ω ~ 10Ω ±400PPM/°C
0402 ~ 2512:
1Ω~10Ω ±200PPM/°C
>10Ω ±100PPM/°C

Automotive Low Resistance

(AEC-Q200 Compliant)
CS02, CS03, CS05, CS06, CS07,
CS10, CS11, CS12



CS










1/8W 10mΩ ±1%
~ ±5%
1W 1Ω

Depends on size and value
range

Camel Geco Elettronica Srl: Exclusive Italian Agent & Distributor



Product List

		Series	Power Rating	Value Range	Tol	T.C.R. PPM/°C & REMARKS
Metal Foil MS01 , MS02, MS03, MS05, MS06, MS17		MS	1/4W ~ 1W	2.5mΩ ~ 50mΩ	±1%	Depends on size and value range
Metal Foil Wide Terminal MW08, MW12, MW15, MW25		MW	1/4W ~ 1W	2.5mΩ ~ 50mΩ	±1%	Depends on size and value range
Metal Film Low Resistance TL01, TL02, TL03, TL05, TL06, TL07, TL10, TL12		TL	1/10W ~ 3W	10mΩ ~ 10Ω	±0.5% ±1% ±2% ±5%	±50PPM/°C ±100PPM/°C ±150PPM/°C ±200PPM/°C
Low T.C.R LT02, LT03, LT05, LT06		LT	1/16W ~ 1/4W	1Ω ~ 1MΩ	±0.25% ±0.5% ±1%	±50PPM/°C ±100PPM/°C
Metal Strip LR12 (AEC-Q200 Compliant)		LR	1W ~ 3W	1mΩ ~ 350mΩ	±1% ±5%	±50PPM/°C
Metal Alloy Low Resistance ML05, ML06, ML12, ML25, ML28, ML27		ML	1W ~ 5W	0.2mΩ ~ 500mΩ	±0.5% ±1% ±2% ±5%	±50PPM/°C ±75PPM/°C ±100PPM/°C
Complete Pb-Free PF0A, PF01, PF02, PF03, PF05, PF06, PF07, PF11, PF10, PF12		PF	1/32W ~ 1W	1Ω ~ 10MΩ	±1% ±5%	1Ω~10Ω: ±400PPM/°C >10Ω~100Ω: ±200PPM/°C >100Ω: ±100PPM/°C (PF0A, PF01 refer to catalog)
High Precision Thin Film TC02, TC03, TC05, TC06, TC07, TC10, TC12		TC	1/16W ~ 3/4W	2.49Ω ~ 1.5MΩ	±0.1% ±0.25% ±0.5% ±1%	±10PPM/°C ±15PPM/°C ±25PPM/°C ±50PPM/°C
High Precision Thin Film New (AEC-Q200 Compliant) TN02, TN03, TN05, TN06		TN	1/16W ~ 1/4W	4.7Ω ~ 1.5MΩ	±0.1% ±0.25% ±0.5% ±1%	±10PPM/°C ±15PPM/°C ±25PPM/°C ±50PPM/°C

CHIP / THROUGH HOLE RESISTORS KIT

Album Type *Std SMD *CQ, HP, SP12 *CFR, MFR, MOR			Album	1/16W ~ 3W	E-6 E-12 E-24 E-96	±1% ±2% ±5%	E Series and value range will depend on the resistor type
Plastic Bag Type CFR, MFR, MOR			Plastic Bag	1/16W ~ 1W	E-6 E-12 E-24	±1% ±2% ±5%	Customize KIT is available upon request

NETWORK RESISTORS - SIL

Resistor Network 4-14 PINS		RNL RPL	1/8W ~ 1/3W	10Ω ~ 1MΩ	±2% ±5%	<50Ω: ±250PPM/°C 50Ω~1MΩ: ±200PPM/°C >1MΩ: ±250PPM/°C (RPL refer to catalog)
--------------------------------------	---	------------	-------------------	-----------------	------------	---

MELF RESISTORS & JUMPER

Carbon Film - MELF 0204, 0207, 0309		MCxx	1/4W ~ 2W	1Ω ~ 5.1MΩ	±2% ±5%	1Ω~100KΩ: ±350PPM/°C 101KΩ~500KΩ: ±700PPM/°C 501KΩ~1MΩ: ±1000PPM/°C 1MΩ~5.1MΩ: ±1500PPM/°C
---	---	------	-----------------	------------------	------------	---

Camel Geco Elettronica Srl: Exclusive Italian Agent & Distributor

















Product List

		Series	Power Rating	Value Range	Tol	T.C.R. PPM/°C & REMARKS
Metal Film - MELF 0102, 0204, 0207, 0309		Mxx	1/8W ~ 2W	0.1Ω ~ 10MΩ	±0.10% ±0.25% ±0.5% ±1% ±2% ±5%	±15PPM/°C ±25PPM/°C ±50PPM/°C ±100PPM/°C
Moulded MELF (Metal Film) 0207		D27	1/2W	10Ω ~ 1MΩ	±0.10% ±0.25% ±0.5% ±1% ±2% ±5%	±15PPM/°C ±25PPM/°C ±50PPM/°C ±100PPM/°C ±200PPM/°C
Fusible Wire Wound MELF (0309) New		FA39	1W	0.47Ω ~ 820Ω	±2% ±5%	≤1Ω: ±400PPM/°C >1Ω: ±200PPM/°C
Jumper Wire		ZW	φ0.45mm ~ φ1.20mm	0Ω	N/A	N/A
Zero Ohm		ZOC ZOT	1/8W ~ 1/4W	0Ω	N/A	ZOC (Ceramic Rod) ZOT (Steel Rod) ZOC 1/4W is EOL
THROUGH HOLE RESISTORS						
Carbon Film		CFR	1/8W ~ 3W	1Ω ~ 10MΩ	±2% ±5% ±10%	≤10Ω: ±300PPM/°C 11Ω~99KΩ: ±450PPM/°C 100KΩ~1MΩ: 0~-700PPM/°C 1.1MΩ~10MΩ: 0~-1500PPM/°C
Precision Metal Film		MFR	1/8W ~ 3W	1Ω ~ 10MΩ	±0.1% ±0.25% ±0.5% ±1% ±2% ±5%	±15PPM/°C ±25PPM/°C ±50PPM/°C ±100PPM/°C ±200PPM/°C
Metal Oxide		MOR	1/4W ~ 9W	0.1Ω ~ 680KΩ	±2% ±5% ±10%	±350PPM/°C
Fusible  (UL Approved - No. E306074)		FRN	1/4W ~ 3W	0.22Ω ~ 10KΩ	±2% ±5% ±10%	±350PPM/°C
Metal Glaze Film (UL Approved - No. E364163)   		MGR	1/4W ~ 3W	1KΩ ~ 100MΩ	±1% ±5%	±200PPM/°C
Power Metal		PMR	1W ~ 3W	0.56Ω ~ 10MΩ	±1% ±2% ±5%	±200PPM/°C ±350PPM/°C ±400PPM/°C
Wire-Wound		KNP	1/2W ~ 10W	0.01Ω ~ 60KΩ	±1% ±2% ±5%	<20Ω: ±400PPM/°C ≥20Ω: ±300PPM/°C
Fusible Wire-Wound  (UL Approved - No. E306074)		KNPU	1W ~ 7W	0.47Ω ~ 240Ω	±5%	<20Ω: ±400PPM/°C ≥20Ω: ±300PPM/°C
Anti-Surge Wire-Wound High Power-small body size Available!		KNPA	1/2W ~ 10W	10Ω ~ 15KΩ	±1% ±2% ±5%	<20Ω: ±400PPM/°C ≥20Ω: ±300PPM/°C

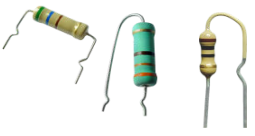









Product List

		Series	Power Rating	Value Range	Tol	T.C.R. PPM/°C & REMARKS
Fusible Wire-Wound Fixed Anti surge available - FWRA (UL Approved - No. E306074)	 	FWR FWRA	1W ~ 3W	0.47Ω ~ 470Ω	±5%	<20Ω: ±400PPM/°C ≥20Ω: ±300PPM/°C
Terminal Wire-Wound		KNH KNHA KNS	2W ~ 100W	0.4Ω ~ 50KΩ	±5% ±10%	<20Ω: ±400PPM/°C ≥20Ω: ±300PPM/°C
Thermal Fusing Wire-Wound		TFR	1W	2.2Ω ~ 4.7Ω	±5% ±10%	±400PPM/°C
Metal Glazed Film Fixed Resistors Patent No.: 1581275		RC06 RC06-1	0.25W	1Ω ~ 10MΩ	±1% ±5%	1Ω ~ 10Ω: ±400PPM/°C 11Ω ~ 100Ω: ±200PPM/°C >100Ω: ±100PPM/°C
Terminal Type Metal Oxide		TMOR TMOV	3W ~ 7W	10Ω ~ 43KΩ	±5%	<20Ω: ±400PPM/°C ≥20Ω: ±350PPM/°C
Forming Type Panaset, Avisert, Formed		CFR MFR MOR FRN KNP	1/8W ~ 5W	10Ω ~ 1MΩ	±5% ±10%	Depends on resistor type, size and value. Refer to catalog
Axial Leaded		PRW PRWA PRWC PRWC-1	1W ~ 25W	0.1Ω ~ 200KΩ	±5% ±10%	<20Ω: ±400PPM/°C ≥20Ω: ±300PPM/°C
Radial Leaded		PRM PRMA PRMB PRS	2W ~ 25W	0.1Ω ~ 200KΩ	±5% ±10%	<20Ω: ±400PPM/°C ≥20Ω: ±300PPM/°C
Radial Terminal		PRZ PRV PRT PRU	5W ~ 50W	0.1Ω ~ 200KΩ	±5% ±10%	<20Ω: ±400PPM/°C ≥20Ω: ±300PPM/°C
Vertical or Axial		PRWI	4W ~ 17W	0.1Ω ~ 39KΩ	±5% ±10%	<20Ω: ±400PPM/°C ≥20Ω: ±350PPM/°C
Thermal Fusible		FTR	1.4W ~ 5.2W	0.22Ω ~ 1.8KΩ	±5% ±10%	<20Ω: ±400PPM/°C ≥20Ω: ±350PPM/°C
Power Flat Alloy		PFA	2W ~ 10W	0.01Ω ~ 3.3Ω	±5% ±10%	≥0.1Ω: ±350PPM/°C (<0.1Ω pls contact us)
SHUNT & COIL RESISTORS						
Shunt		CSR	4.5A ~ 50A	3mΩ ~ 50mΩ	±2% ±5% ±10%	±400PPM/°C

Camel Geco Elettronica Srl: Exclusive Italian Agent & Distributor



Product List

		Series	Power Rating	Value Range	Tol	T.C.R. PPM/°C & REMARKS
Coil		CSC	4A ~ 12A	3mΩ ~ 50mΩ	±5% ~ ±10%	Depends on value range
INDUSTRIAL POWER RESISTORS						
Power Dissipation Mount		PDMS PDM	5W ~ 100W	0.01Ω ~ 35KΩ	±5% ~ ±10%	<20Ω: ±400PPM/°C ≥20Ω: ±350PPM/°C
Power (Ribbon) Wire-Wound		QH QL QR QRZG	20W ~ 2500W	0.2Ω ~ 200KΩ	±5% ~ ±10%	<20Ω: ±400PPM/°C ≥20Ω: ±350PPM/°C
Aluminum Case High Power Wire-Wound		HEWR HBWR	60W ~ 2000W	0.5Ω ~ 15KΩ	±5% ~ ±10%	±350PPM/°C
Thermal Fuse Wire-Wound (Blower Fan Resistor)		ASSY	12V	0.1Ω ~ 10Ω	±10%	±350PPM/°C
SURFACE MOUNT RESISTORS						
Surface Mount New Wirewound Power Resistors		PWR	1W	1Ω ~ 200Ω	±5%	1Ω<R<10Ω: ≤±50PPM/°C 10Ω<R≤200Ω: ≤±20PPM/°C
Metal Strip New Plastic Surface Mount Resistors		MP19	7W	3mΩ ~ 60mΩ	±1% ~ ±5%	±50PPM/°C
Chip Resistors Shunt New RS06, RS12, RS20, RS26, RS30		RS	2W ~ 15W	0.25mΩ ~ 5mΩ	±1% ~ ±2% ~ ±5%	Depends on size, power & value. Refer to catalog

****Customized design capability**

Camel Geco Elettronica Srl: Exclusive Italian Agent & Distributor



Product List

Series	Power Rating	Value Range	Tol	T.C.R. PPM/°C & REMARKS
--------	-----------------	----------------	-----	----------------------------

CONTACT:

CAMEL GECO ELETTRONICA SRL

v. Bergamo, 16 – 20020 – Lainate (MI)

E-mail: info@camelgeco.it

Web-site: www.camelgeco.it

Tel. +39 02 93570527

Legal Disclaimer

The information provided in the catalog/data sheet /single pages/short form is for the purpose of describing product specifications only, and ROYALOHM and its affiliates (hereinafter collectively referred to as "ROYALOHM") hereby disclaim any liability for any errors, inaccuracies or incompleteness contained in any product-related information (including but not limited to product specifications, datasheets, pictures, graphics). ROYALOHM reserves the right to modify this content without prior notice. Thank you for your understanding.

ROYALOHM makes no representation, warranty, and guarantee as to the fitness of its products for any particular purpose or the continuing production of any ROYALOHM products.

To the maximum extent permitted by law, ROYALOHM disclaims

- I. any and all liability arising out of the application or use of any ROYALOHM product,
- II. any and all liability, including without limitation special, consequential or incidental damages, and
- III. any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

ROYALOHM products are not intended for use in medical, life-saving, or life-sustaining equipment, nor are they intended for any other purpose where product failure or mismanagement could endanger life or cause harm to or death to the human body. Customers use or sell ROYALOHM products for the above purposes at their own risk. If need products for such purposes, please be sure to consult with our company to obtain relevant information about the applicable products.

Regardless of the application of ROYALOHM products, it is recommended to carry out safety tests while using measures such as protective circuits and redundant circuits to protect the safety of equipment.

Camel Geco Elettronica Srl: Exclusive Italian Agent & Distributor